



## AN-0206M 6.3V Filament Transformer

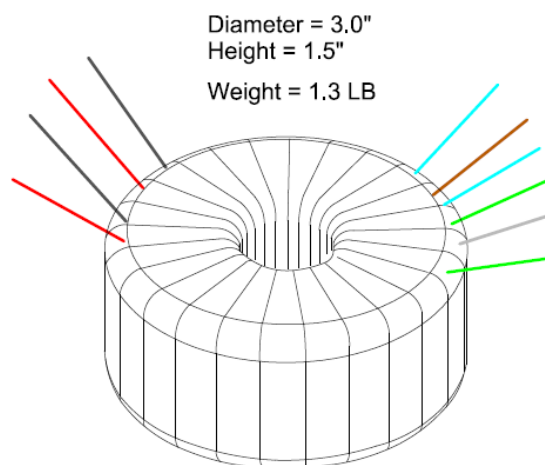

This 25VA toroidal transformer is specially designed for powering 6.3V vacuum tube filaments. It operates on standard 115V or 230V input at 50Hz or 60Hz. Built with heavier gauge copper wires than typically required, it minimizes copper loss during full power output. The transformer features extremely low magnetic leakage and exceeds 2500V in dielectric strength between the primary and secondary windings.

At 60Hz, it can reliably deliver up to 20% more power than its rated output. The unit includes a rubber mounting pad and all necessary hardware for easy installation.

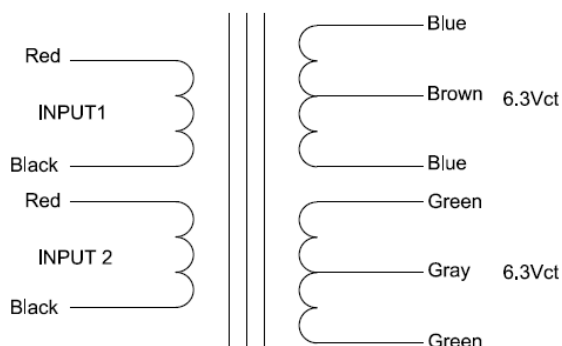

Model #	Input 1	Input 2	Output 1	Output 2	I <sub>rated</sub>	V <sub>test</sub> 1*	V <sub>test</sub> 2*
AN-0205	115V	115V	5V	5V	5.00A	5.0V at 2.47A	4.5V at 4.75A
AN-0206	115V	115V	6V	6V	4.08A	5.7V at 2.00A	5.4V at 4.00A
<b>AN-0206M</b>	<b>115V</b>	<b>115V</b>	<b>6.3V</b>	<b>6.3V</b>	<b>4.00A</b>	<b>6.4V at 3.72A</b>	<b>6.2V at 4.60A</b>
AN-0207	115V	115V	7V	7V	3.57A	6.7V at 1.82A	6.5V at 3.44A
AN-0209	115V	115V	9V	9V	2.77A	8.9V at 1.53A	8.2V at 3.00A
AN-0210	115V	115V	10V	10V	2.50A	9.9V at 1.58A	9.2V at 2.35A
AN-0212	115V	115V	12V	12V	2.04A	11.7V at 0.98A	10.9V at 1.80A
AN-0215	115V	115V	15V	15V	1.66A	14.7A at 0.88A	13.9V at 1.60A
AN-0218	115V	115V	18V	18V	1.39A	17.5V at 0.61A	16.8V at 1.42A
AN-0220	115V	115V	20V	20V	1.25A	19.6V at 0.47A	18.6V at 1.21A
AN-0222	115V	115V	22V	22V	1.13A	21.5V at 0.41A	20.5V at 1.25A
AN-0224	115V	115V	24V	24V	1.04A	23.1V at 0.46A	22.3V at 1.06A
AN-0225	115V	115V	25V	25V	1.00A	24.2V at 0.46A	23.0V at 1.01A
AN-0230	115V	115V	30V	30V	0.83A	29.0V at 0.40A	28.5V at 0.82A
AN-0232	115V	115V	32V	32V	0.78A	31.4V at 0.45A	30.0V at 0.79A
AN-0235	115V	115V	35V	35V	0.71A	35.0V at 0.21A	34.2V at 0.75A
AN-0240	115V	115V	40V	40V	0.62A	39.5V at 0.26A	38.5V at 0.63A

\* both outputs are connected in parallel with input voltage at 120Vac 60Hz.