




This 30W Single Ended toroidal output transformer is newly made for high-end HiFi audio amplifiers. It uses toroidal core with air gaps to improve the audio quality. It will work with the most common output tubes.

SPECIFICATION:

Output power	30 Watt
Turn Ratio	18:1
Ultra Linear tap	40%
Primary impedance	2.5K ohm
Primary DC resistance	122 ohm
Output impedance	4 & 8 ohm
Output DC resistance	0.1 & 0.2 ohm
Max DC current	170mA
Frequency response	10Hz - 20KHz
Size	Ø = 4.7" H = 2.2"
Weight	6 LB
Suggest Tubes	6L6, 807, 5881, 6550



Optional steel case showed. Order number **CA-004**

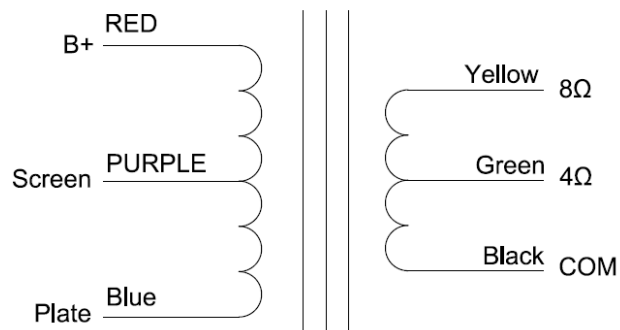

Frequency Response with 8 ohm Load

