AnTek Inc.
www.antekinc.com

MS-30W25 30W Single Ended Output Transformer

Optional steel case showed. Order number **CA-004**

This 30W single-ended toroidal output transformer is specifically designed for high-end Hi-Fi audio amplifiers. It features a precision-engineered toroidal core with carefully calculated air gaps to support proper DC biasing and enhance audio performance. The design minimizes distortion and improves frequency response, delivering clean, detailed sound reproduction. Compatible with most commonly used output tubes, this transformer offers an excellent solution for audiophiles seeking superior sound quality in single-ended amplifier designs.

SPECIFICATION:

Output power	30 Watt
Turn Ratio	18:1
Ultra Linear tap	40%
Primary impedance	2.5K ohm
Primary inductance	15 Henry
Primary DC resistance	122 ohm
Output impedance	4 & 8 ohm
Output DC resistance	0.1 & 0.2 ohm
Max DC current	170mA
Frequency response	10Hz - 20KHz
Size	Ø = 4.7” H = 2.2”
Weight	6 LB
Suggest Tubes	300B SE, Parallel SE, 807

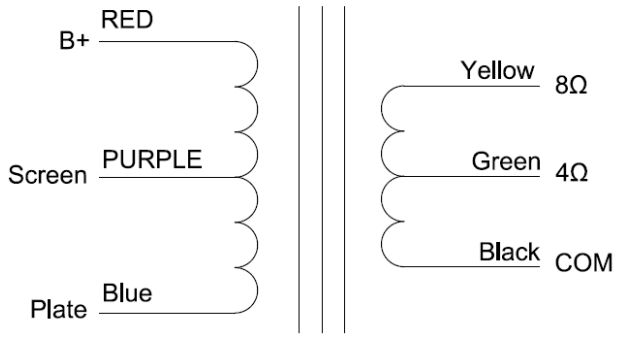

Frequency Response with 8 ohm Load

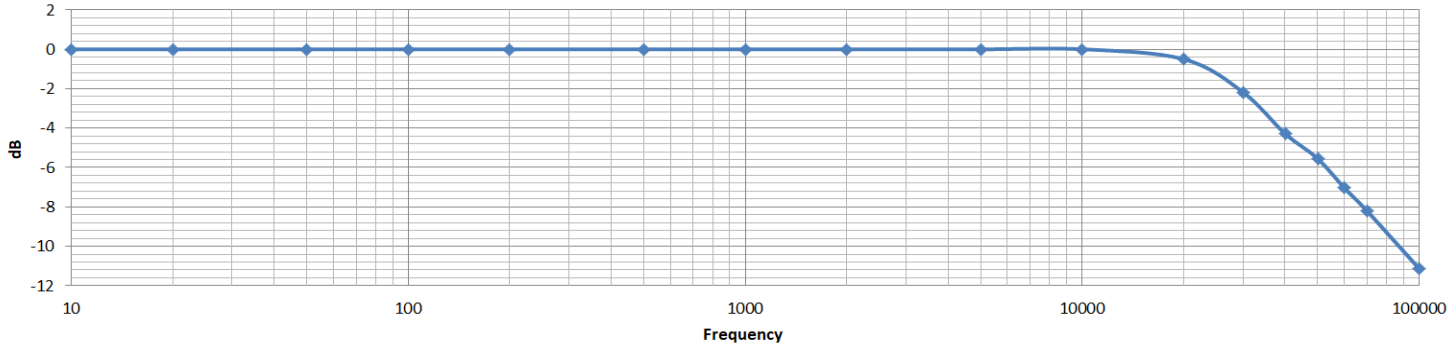

29 Ewing Ave.
N. Arlington, NJ 07031

Tel: 201-991-3300
sales@antekinc.com