




This 30W Single Ended toroidal output transformer is newly made for high-end HiFi audio amplifiers. It uses toroidal core with air gaps to improve the audio quality. It will work with the most common output tubes.

**SPECIFICATION:**

Output power	30 Watt
Turn Ratio	25:1
Ultra Linear tap	40%
Primary impedance	5K ohm
Primary DC resistance	256 ohm
Output impedance	4 & 8 ohm
Output DC resistance	0.1 & 0.2 ohm
Max DC current	150mA
Frequency response	10Hz - 20KHz
Size	Ø = 4.7" H = 2.2"
Weight	6 LB
Suggest Tubes	6AQ5, 6V6, 6L6, 807, 5881, 6550, EL84



Optional steel case showed. Order number CA-004

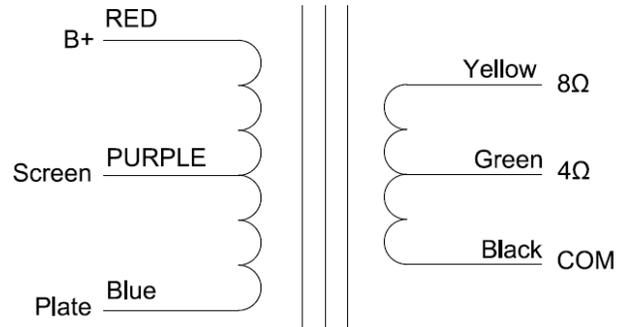

Frequency Response with 8 ohm Load

