




This 30W single-ended toroidal output transformer is specifically designed for high-end Hi-Fi audio amplifiers. It features a precision-engineered toroidal core with carefully calculated air gaps to support proper DC biasing and enhance audio performance. The design minimizes distortion and improves frequency response, delivering clean, detailed sound reproduction. Compatible with most commonly used output tubes, this transformer offers an excellent solution for audiophiles seeking superior sound quality in single-ended amplifier designs.

SPECIFICATION:

| | |
|-----------------------|---------------------------|
| Output power | 30 Watt |
| Turn Ratio | 35:1 |
| Ultra Linear tap | 40% |
| Primary impedance | 7.5K ohm |
| Primary inductance | 40 Henry |
| Primary DC resistance | 167 ohm |
| Output impedance | 4 & 8 ohm |
| Output DC resistance | 0.1 & 0.2 ohm |
| Max DC current | 150mA |
| Frequency response | 10Hz - 20KHz |
| Size | Ø = 4.7" H = 2.2" |
| Weight | 6 LB |
| Suggest Tubes | 300B SE, Parallel SE, 807 |



Optional steel case showed. Order number CA-004

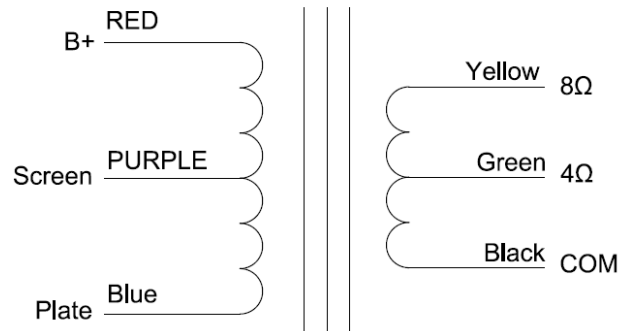

Frequency Response with 8 ohm Load

