


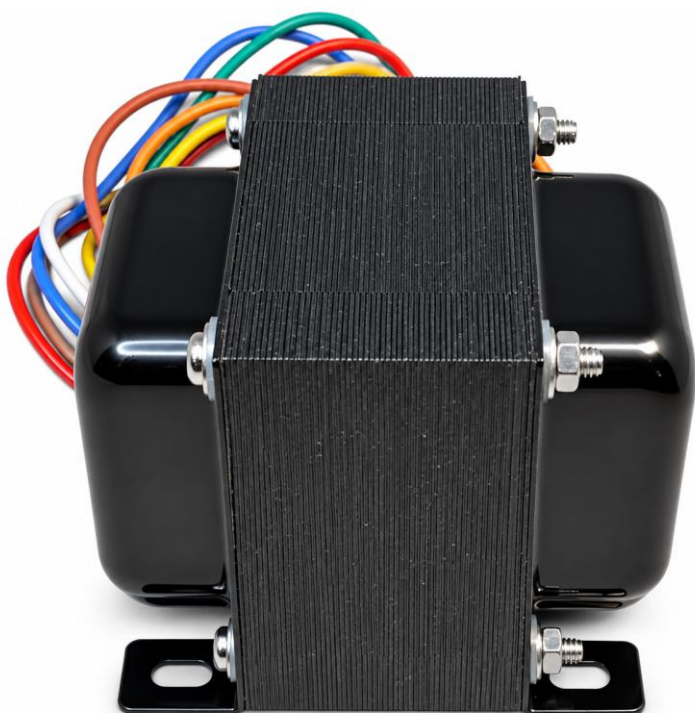

Antek ST-35 Compatible Output Transformer

Designed as an independent reproduction of the classic Dynaco ST-35 output transformer, this EI-core transformer is engineered to deliver the performance characteristics associated with the original design.

Manufactured using high-quality silicon steel laminations and carefully wound coils, it offers excellent frequency response, reliable power handling, and low distortion. It is an ideal replacement for Dynaco ST-35 amplifiers and is also suitable for compatible EL84/6BQ5 push-pull tube amplifier designs.

SPECIFICATION:

Output power	17.5 Watt
Turn Ratio	31:1
Ultra Linear tap	40%
Primary impedance	8K ohm CT
Inductance	50 Henry
Primary DC resistance	365 Ω
Output impedance	4, 8 & 16 Ω
Output DC resistance	0.6 & 0.9 Ω
Max DC plate current	100mA
Frequency response	10Hz - 20KHz
Mt Holes 2x2	2.25" x 2.0"
Weight	3.3 LB
Suggest Tubes	EL84, 6BQ5

